

Rackmount Managed Ethernet Switch



UT-63424G Series

10 Gigabit Layer 3 Managed Ethernet Switch



- Support 16 Gigabit SFP network interfaces (or 16 Gigabit Ethernet interfaces) + 4 10Gbps SFP+ interfaces + 8 Gigabit Combo ports
- 10Gbps SFP+ interface supports 10Gigabit/Gigabit adaptive
- Support IGMP Snooping/MLD Snooping to filter multicast packets
- IEEE 802.1Q VLAN support for easy network planning
- Supports QoS with 8 queue mapping to increase network stability
- Support STP/RSTP and MSTP network redundancy
- Support SNMPv1/v2v3 to ensure network security management
- Supports link aggregation (static convergence/LACP) to optimize network bandwidth
- Support Access Control List (ACL) to enhance flexibility and network management security
- Support port mirroring function for online debugging
- Support port speed limit\broadcast storm suppression\multicast storm suppression\unknown unicast storm suppression
- Support Layer 3 switching function (static route/Rip/OSPF/VRRP)
- Support power supply, port abnormal state relay output alarm function
- Operating temperature: -40~75°C
- Support IP40 protection, fan-less, industrial grade, rack-mounted design

OVERVIEW

The UT-63424G series is a high-performance, cost-effective managed 10 Gigabit industrial Ethernet Layer 3 switch. The series includes two models that provide 16 Gigabit SFP network interfaces (or 16 Gigabit Ethernet interfaces), 4 10 Gigabit SFP+ interfaces and 8 Gigabit composite interfaces, which not only increase bandwidth and improve network data communication, but also are ideal for large-scale industrial network applications. The series products support a variety of Layer 2 software features (port mirroring, VLAN, port aggregation, IGMP Snooping, QoS, STP/RSTP/MSTP, etc.) and basic IPv4/IPv6 Layer 3 routing protocols (static routing/RIP/OSPF/VRRP), providing users with a complete solution to better build large scale industrial networks for plant automation, intelligent transportation. It provides more options to build large local area networks for industrial applications such as plant automation, intelligent transportation, video surveillance, etc.

SPECIFICATION

Protocol Standards
Standard: IEEE802.3,IEEE802.3u,IEEE802.3x,IEEE802.3z, IEEE802.3ab,IEEE802.1Q,IEEE802.1p, IEEE802.1D, IEEE802.1W,IEEE802.1s,IEEE802.3ad, IEEE802.1x,IEEE802.3ae
Flow control: IEEE802.3x flow control, backpressure flow control

Protocol: RP, ICMP, TCP, HTTP/HTTPS,Telnet, STP/RSTP/MSTP, LLDP, IGMP, SNMPv1/v2c/v3, DHCP Server, NTP, SSH, IPV6, LACP, VLAN
Layer 3 switching technologies: static routing, RIP V1/V2, OSPF, VRRP support Router redundancy

Interfaces
 Fiber interface: 100/1000BaseX, SFP (interface) 1G/10Gbps SFP+ (10 Gigabit SFP)
 RJ45 interface: 10/100/1000Base-T, auto-MDI/MDI-X
 Console port: serial port debugging (RJ45 interface)
 Alarm port: 3PIN terminal, relay alarm information output

Power Requirement
 Input voltage: 110/220VAC(88~264VAC)/50-60Hz or 110/220VDC(88~264VDC)
 The device selects single power input, optional dual power redundant input

LED indicator light
 power indicator, network indicator, alarm indicator, operation indicator

Power consumption
 Max. input power consumption 400mA@24Vmax

Power Consumption
 UT-63424G-16GP8GB-4XGP-BNA:
 No-load power: 14.5W
 Full load power: 39W (Combo port is optical port)
 UT-63424G-16GT8GB-4XGP-BNA:
 No-load power: 10.3W
 Full load power: 24W (Combo port is optical)

Transmission Distance
 Cat.5e: 100m
 Fiber Patch Cord
 Single-mode: 1310nm 20/40/60Km 1550nm 80/100/120Km
 Multi-mode: 1310nm 2Km

Mechanical Dimension
 Dimension (W x H x D): 440mm x 44mm x 315mm
 Weight: 3.5Kg


Switching Performance
 100M ports: 148,810pps
 1000M ports: 1,488,095pps
 10 Gigabit port: 14,881,000pps
 Transmission mode: store and forward
 MAC address size: 16K
 Cache size: 12Mb
 Backplane bandwidth: 208G
 Max. frame length: 9216B
 Host unicast routing: 1024 (IPv4), 512 (IPv6)
 Segment unicast routing: 512 (IPv4/IPv6)

Operating Environment
 Operating temperature: -40 ~ 75°C
 Storage temperature: -40 ~ 85°C
 Relative humidity: 0~95% (non-condensing)

Mechanical Characteristics
 IP protection level: IP40
 Installation: Rack-Mounted

Industrial Standards
 EMI: FCC Part 15, CISPR (EN55022) class A
 EMS:
 IEC(EN)61000-4-2(ESD)
 IEC(EN)61000-4-3(RS)
 IEC(EN)61000-4-4(EFT)
 IEC(EN)61000-4-5(Surge)
 IEC(EN)61000-4-6(CS)
 IEC(EN)61000-4-8
 IEC 60068-2-27(Shock)
 IEC 60068-2-32(Freefall)

Dimension

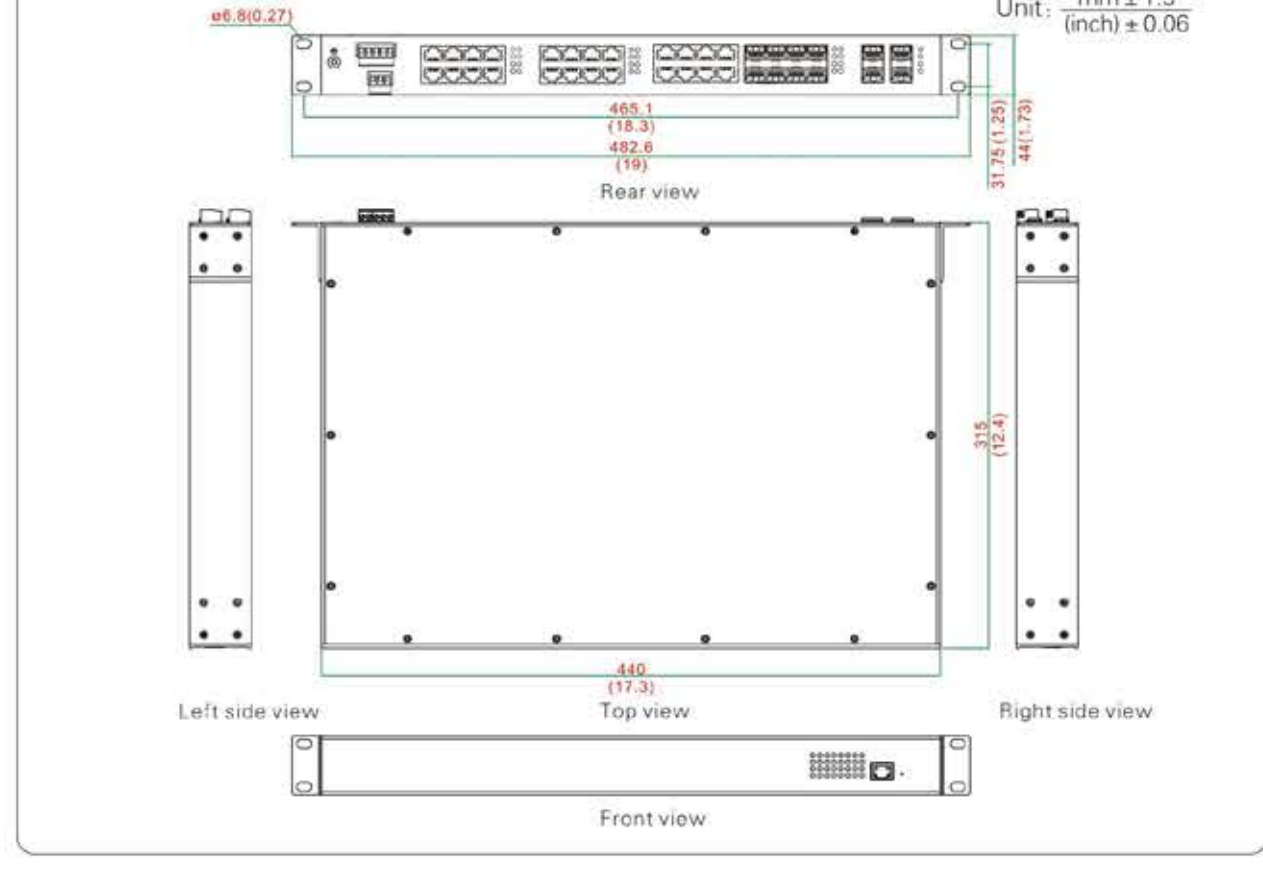

ORDER INFORMATION

Model	Interface Description			
	1000Base-X	10/100/1000Base-T	Combo	10G BaseX(SFP+)
UT-63424G-12GT12GP-4XGP-BNA	12	12	-	4
UT-63424G-16GP8GB-4XGP-BNA	16	-	8	4
UT-63424G-16GT8GB-4XGP-BNA	-	16	8	4